



HYDRAULIC REVOLVING HOUSING

CILINDRO ROTATIVO IDRAULICO / CYLINDRE HYDRAULIQUE ROTATIF /

HYDRAULISCHER SCHALTUNGSZYLINDER

New



NOMINAL VALUES HYDRAULIC CYLINDER:

- RANGE OIL TEMPERATURE - 30°C + 90°C
- MAX WORKING PRESSURE HYDRAULIC 180 bar (2700 PSI)

VALORI NOMINALI CILINDRO IDRAULICO:

- TEMPERATURA AMMISSIBILE DELL'OLIO - 30°C + 90°C
- PRESSIONE MASSIMA CILINDRO IDRAULICO 180 bar (2700 PSI)


Code	Model	Kg	WORKING CONDITONS bar)	Article
5090000008	MEC 2000-8000	2.2	50 ÷ 180	2101/2
5090000010	MEC 9000-13500	2.2	50 ÷ 180	2101/10
5090000010	STAR-SE-AGRI-WPT-KTS	2.2	50 ÷ 180	2101/10

NOMINAL VALUES HYDRAULIC CYLINDER:

- RANGE OIL TEMPERATURE - 30°C + 90°C
- MAX WORKING PRESSURE HYDRAULIC 180 bar (2700 PSI)

VALORI NOMINALI CILINDRO IDRAULICO:

- TEMPERATURA AMMISSIBILE DELL'OLIO - 30°C + 90°C
- PRESSIONE MASSIMA CILINDRO IDRAULICO 180 bar (2700 PSI)

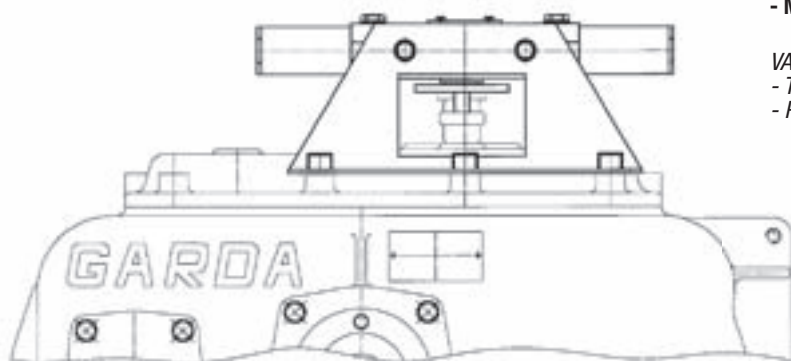

Code	Model	Kg	WORKING CONDITONS bar)	Article
5090000011	GARDA	2.2	50 ÷ 180	2102/11
5090000012	LEDRA	2.2	50 ÷ 180	2102/12